
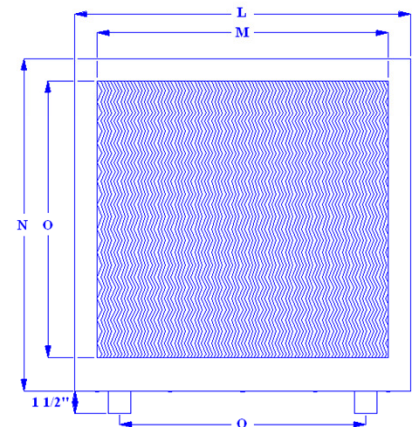
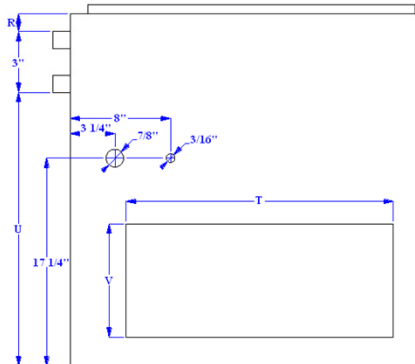


Elite Heat Air Handlers

Engineering Specifications						
Elite Heat Air Handler	AH 60	AH 110	AH 135	AH 150	AH 170	AH 220
Total Heating Capacity (BTU/hr)	62,039	115,061	141,795	154,932	175,013	220,057
Entering Water Temperature (Deg °F)	180	180	180	180	180	180
Entering Air Temperature (Deg °F)	65	65	65	65	65	65
Head Loss (Ft H ₂ O)	1.30	1.00	3.60	4.00	4.20	6.10
Tube Flow (Gal/Min)	5	5	10	10	10	10
Air Pressure Drop (In H ₂ O)	0.60	0.80	0.60	0.50	0.70	0.40
Air Flow----- (High Speed) (CFM)	926	1824	1824	1824	2374	2374
(Mid-High Speed) (CFM)	926	1653	1653	1653	2093	2093
(Medium Speed) (CFM)	926	1430	1430	1430	1819	1819
(Low Speed) (CFM)	926	1266	1266	1266	1547	1547
RPM----- (High Speed) (RPM)	1075	1024	1024	1024	1078	1078
(Mid-High Speed) (RPM)	1075	915	915	915	996	996
(Medium Speed) (RPM)	1075	830	830	830	892	892
(Low Speed) (RPM)	1075	802	802	802	803	803
Operational Amps (AMPS)	4.00	8.80	8.80	8.80	11.20	11.20
Horse Power (HP)	1/4	1/2	1/2	1/2	3/4	3/4
Shipping Weight (lbs)	103	135	135	135	147	162

DIMENSIONS (in.)	AH 60	AH 110	AH 135	AH 150	AH 170	AH 220
C	5 1/4	4	4 3/8	4 1/4	4 1/8	4 1/8
D	4 1/2	3 1/4	3 5/8	3 1/4	3 3/8	3 3/8
E	7 7/8	6 1/4	6 1/4	6	6 1/4	6 3/8
F	7 1/8	5 1/2	5 7/8	5 1/2	5 1/2	5 5/8
G	3 5/8	3 1/4	3 1/2	2 7/8	3 1/2	2 3/4
H	3 3/4	3 1/4	3 1/2	2	3 1/2	2 5/8
L	18	20 1/8	20 1/8	20 1/8	20 1/8	25 1/2
M	16 1/2	18 5/8	18 5/8	18 5/8	18 5/8	24
N	20 1/2	22 3/4	22 3/4	22 3/4	26	28 1/4
O	17 3/4	20	20	20	23 1/4	25 1/2
Q	10 3/4	14	14	15 1/2	13 3/4	20
R	4	2 7/8	2 7/8	2 7/8	2 7/8	2 7/8
T	17 3/4	17 3/4	EHAH	17 3/4	22 3/4	22 3/4
U	26 1/4	27 1/4	27 1/4	27 1/4	27 1/4	27 1/4
V	12	14	14	14	14	14
Pipe Size O.D.	7/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8
Price	715.00	795.00	830.00	850.00	905.00	995.00

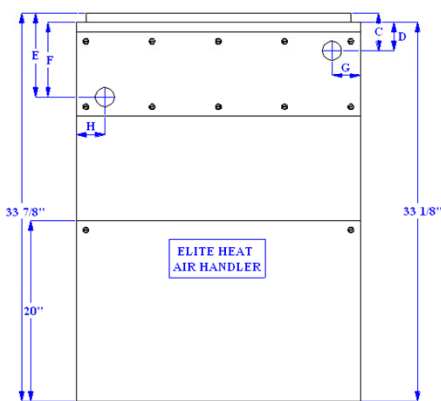

We accept the following forms of payment:

