


Unit Heater Specifications

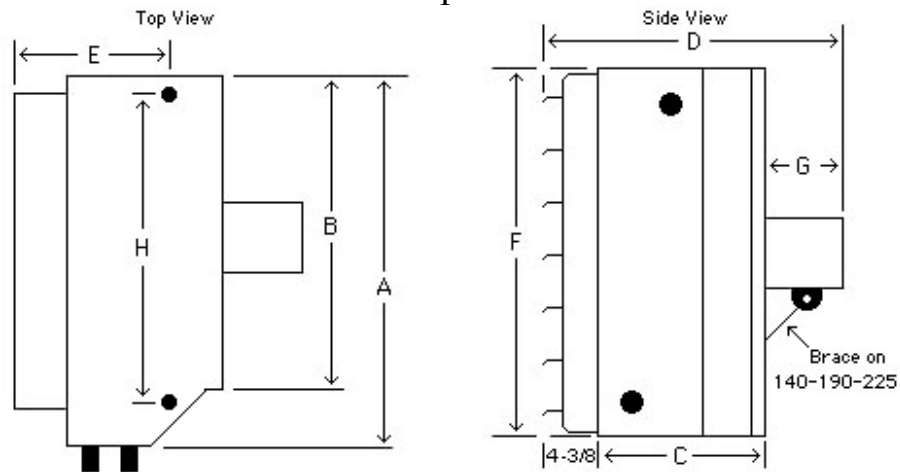

Unit Heater Dimensions. All measurements are in inches.

Model	A	B	C	D	E	F	G	H=Anchor width	Water Lines=ID	Shipping Weight=Lbs
UH18	13-5/8	10-1/8	10-1/4	19-5/8	10-1/2	10-3/8	5	10-1/2	1	33
UH60	19-5/8	16-1/8	10-1/4	17-1/4	10-1/2	16-3/8	2-3/4	16-1/2	1	53
UH95	23-5/8	20-1/8	10-1/4	18-1/8	10-1/2	20-3/8	3-1/2	20-1/2	1	69
UH140	25-5/8	22-1/8	10-1/4	20	10-1/2	22-3/8	5-1/8	22-1/2	1	78
UH190	27-5/8	24-1/8	10-1/4	21-1/4	10-1/2	24-3/8	6-5/8	24-1/2	1	104
UH225	31-5/8	28-1/8	10-1/4	19-3/4	10-1/2	28-3/8	5-1/8	28-1/2	1	127

Unit Heater Specifications. Internal Specifications using water. Entering Air Temperature = 60°

Model	BTUs EWT-200°	BTUs EWT-180°	CFM - Amps	GMP	APD	Speeds	Approximate FOH-WPD	Approximate LWT at 200°	Approximate LWT at 180°	HP
UH18	19,732	16,881	180 - 1.4	7	.05	No	2.16	194°	175°	1/30
UH60	64,923	55,506	700 - 1.4	11	.11	Yes	2.73	187°	169°	1/30
UH95	102,058	87,243	935 - 1.6	12	.10	Yes	2.47	182°	165°	1/20
UH140	158,184	135,066	1,770 - 3.9	12	.20	Yes	2.23	172°	156°	1/4
UH190	206,831	176,585	2,278 - 4.9	14	.25	Yes	2.66	169°	154°	1/4
UH225	244,239	208,638	2,690 - 4.1	16	.19	Yes	2.87	168°	153°	1/4

These results have been calculated using a combination of physical testing and computer software designed for the use of developing heat exchangers and related products. These results have been produced by Paukner Metal Products and are believed to be accurate. Actual results may vary depending on installation.